

DSBOARD-AGX

AGX ORIN CARRIER BOARD



- > Powerful and reliable edge computing for industrial apps
- NVIDIA Jetson AGX Orin with up to 275 TOPS of AI performance
- > CAN, RS-232 and Gigabit Ethernet interfaces
- HDMI 2.0b with up to 8Kp60 resolution
- > Wide range of connectivity options
- Multiple expansion slots for additional peripherals
- Runs on NVIDIA JetPack SDK for building Al apps
- Designed for harsh industrial environments
- > Ideal for robotics, automation, and surveillance

TECHNICAL SPECIFICATIONS

Supported Modules	NVIDIA Jetson AGX Orin 32GB NVIDIA Jetson AGX Orin 64GB
Memory	32 GB 256-bit LPDDR5x 64 GB 256-bit LPDDR5x
Graphics Interfaces	1x HDMI 2.0(max resolution 3840x2160)
Interfaces	1x Gigabit Ethernet 2x USB 3.1 Type-A 1x CAN Bus 1x RS232/422/485 (software configurable) 2x USB-C (Debug/Recovery) 2x Digital Input 3x Digital Output
Wireless Communication	LTE/5G Connectivity by extension sockets
Power Supply	12-32 VDC
	12-32 VDC 1x M.2 Key-B, 1x SIM, 1x MicroSD, 1x 5V Fan 1x SPI, 1x UART, 1x I2C, 1x PCIE (x4), 1x I2S, 1 x XFI for 10G 1x Camera Connector (6 CSI camera support)
Power Supply	1x M.2 Key-B, 1x SIM, 1x MicroSD, 1x 5V Fan 1x SPI, 1x UART, 1x I2C, 1x PCIE (x4), 1x I2S, 1 x XFI for 10G
Power Supply Extension Sockets	1x M.2 Key-B, 1x SIM, 1x MicroSD, 1x 5V Fan 1x SPI, 1x UART, 1x I2C, 1x PCIE (x4), 1x I2S, 1 x XFI for 10G 1x Camera Connector (6 CSI camera support) 64 GB eMMC 5.1 Flash
Power Supply Extension Sockets Mass Storage	1x M.2 Key-B, 1x SIM, 1x MicroSD, 1x 5V Fan 1x SPI, 1x UART, 1x I2C, 1x PCIE (x4), 1x I2S, 1 x XFI for 10G 1x Camera Connector (6 CSI camera support) 64 GB eMMC 5.1 Flash 1x M.2 Key-M SSD Slot
Power Supply Extension Sockets Mass Storage Ambient Conditions Form Factor /	1x M.2 Key-B, 1x SIM, 1x MicroSD, 1x 5V Fan 1x SPI, 1x UART, 1x I2C, 1x PCIE (x4), 1x I2S, 1 x XFI for 10G 1x Camera Connector (6 CSI camera support) 64 GB eMMC 5.1 Flash 1x M.2 Key-M SSD Slot



DSBOARD-AGX is a powerful and reliable edge computing device designed for industrial applications that require high processing power and ruggedness. It is based on the NVIDIA Jetson AGX Orin systemon-module (SOM), which features an NVIDIA Ampere GPU with 1024 CUDA cores and up to 275 TOPS (trillion operations per second) of Al performance. The AGX Orin SOM also includes a 12-core ARMv8.2 CPU and a dedicated deep learning accelerator for efficient inferencing.

The DSBOARD-AGX features a wide range of connectivity options, including Gigabit Ethernet, USB 3.0, HDMI, and RS-232, as well as multiple expansion slots for adding additional peripherals such as MIPI CSI-2 cameras.

The DSBOARD-AGX runs on the NVIDIA JetPack SDK, providing a complete software development environment for building and deploying Al applications in industrial environments. With its powerful AGX Orin SOM, the DSBOARD-AGX is capable of running complex AI algorithms and processing large amounts of data in realtime, making it an ideal choice for industrial applications such as robotics, automation, and surveillance.







Security and Surveillance



Healthcare



Robotics



Industrial **Automation**



Agriculture










BLOCK DIAGRAM

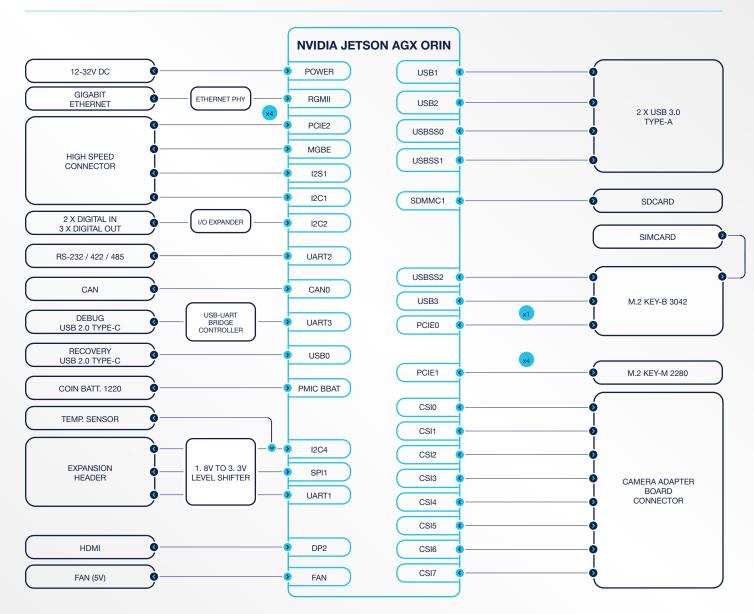

FOR ORDERING

Forecr OÜ (Reg No: 16578675)

VAT No: EE102592089 Sakala tn 7-2, Tallinn, 10141, Estonia

Forecr OÜ (Technopol Office)

Akadeemia tee 21/1 (II-floor), Room 219, 12618, Tallinn, Estonia

Mist Elektronik Ltd. Sti.

Gazi Üniversitesi Gölbaşı Yerleşkesi Teknokent Binası B Blok No:10/50-B/23 06830 Gölbaşı / ANKARA / TURKEY











